

KH DVB-C HD Encoder Modulator

- ▶ HDMI → DVB-C/DVB-T/ATSC/ISDB-T Encoder & Modulator
- ▶ DVB-C/T/ATSC/ISDB-T RF in one device, Modulation dynamic switching
- ▶ Support CC (Closed Caption), EIA 608
- ▶ Support LCN

Home Version



A device that allows audio and video signal input in TV distributions with applications in home entertainment, Digital Signage for hotels, shops, restaurants etc...



General Description

This encoder & modulator is designed based on consumer electronics which allow audio/video signal input in TV distributions with applications in home entertainment, surveillance control, hotel Digital Signage, shops etc.

It is an all-in-one device integrating MPEG2 encoding and modulating to convert audio/video signals into DVB-C/T/ATSC/ISDB-T RF out.

The signals source could be from STB, satellite receiver, closed-circuit television cameras and antenna etc. Its output signal is to be received by TVs or STBs etc.

System Connection

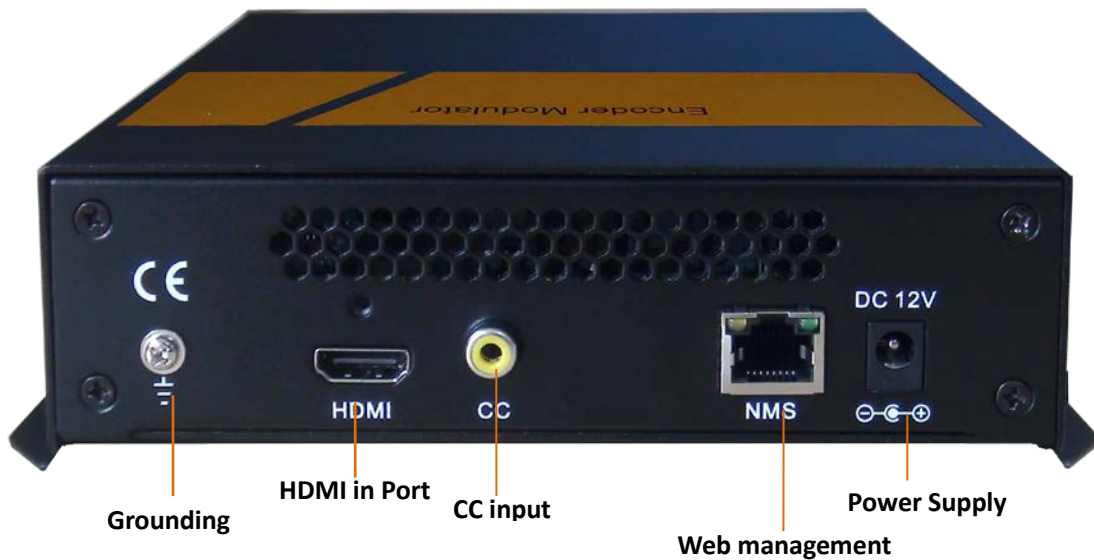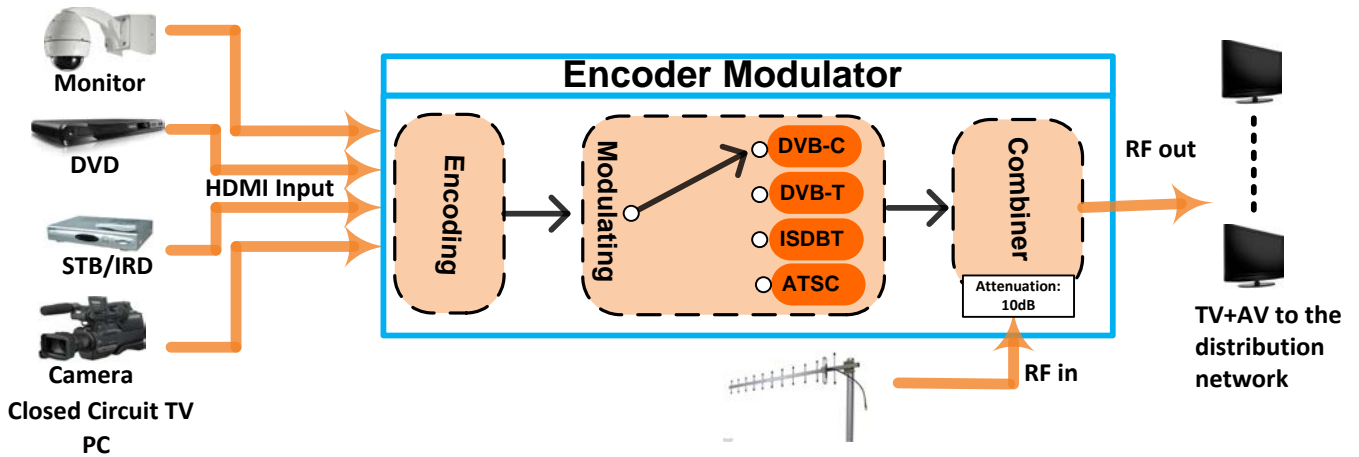

Technical Specifications

HDMI Encoding Section			
Video	Encoding	MPEG2	
	Interface	HDMI*1	
		Input	Output
		480@59.94/60i	480@30p
		576@50i	576@25p
		720@50/59.94/60p	720@25/30p
		1080@50i	1080@25p
		1080@59.94/60i	1080@30p
		1080@50p	1080@25p
		1080@59.94/60p	1080@30p
	Aspect Ratio	16:9	
	Bit rate	1.000~20.000 Mbps	

Audio	Encoding	MPEG1 layer 2, AAC, AC3
	Sample rate	48KHz
	Bit rate	MPEG1 layer 2 (192kbps)
		AAC (VBR)
AC3 (128kbps)		

DVB-C Modulator Section

Standard	J.83A (DVB-C), J.83B	
MER	≥35dB	
RF frequency	100-1000MHz, 1KHz step	
RF output level	-63~-16dBm (44~91 dBμV), 1dB step	
Symbol rate	3.000~7.000Msps adjustable	
	J.83A	J.83B
Constellation	16/32/64/128/ 256 QAM	64/ 256 QAM
Bandwidth	8M	6M

DVB-T Modulator Section

Standard	DVB-T COFDM	
Bandwidth	2M, 3M, 4M, 5M, 6M, 7M, 8M	
Constellation	QPSK, 16QAM, 64QAM	
Code rate	1/2, 2/3, 3/4, 5/6, 7/8	
Guard Interval	1/32, 1/16, 1/8, 1/4	
Transmission	2K, 8K	
Mode:		
MER	≥35dB	
RF frequency	100-1000MHz, 1KHz step	
RF output level	-63~-16dBm(44~91 dBμV), 1dB step	

ISDB Modulator Section

Standard	ARIB STD-B31
Constellation	QPSK, 16QAM, 64QAM
Guard Interval	1/32, 1/16, 1/8, 1/4
Transmission Mode	2K, 4K, 8K
Code rate	1/2, 2/3, 3/4, 5/6, 7/8
RF frequency	100~1000MHz, 1KHz step
RF output level	-63~-16dBm(44~91 dBμV), 1dB step

ATSC Modulator Section

Standard	ATSC A/53
Constellation	8 VSB
RF output level	-63~-16dBm (44~91 dBμV), 1dB step
MER	≥35dB
RF frequency	100~1000MHz, 1KHz step
RF output level	-63~-16dBm(44~91 dBμV), 1dB step

System

Management	Web
Language	English
Upgrade	Web update

General

Power supply	DC 12V
Dimensions	203*144*52mm
Weight	< 1kg

...for communities of residents
an information channel on their television



...for restaurants
information about daily menus ,special deals,etc



...for hotels
meeting rooms,exhibitions,message,etc



...for hospitals
training courses, healthy guide, etc



...for Public Spaces
adversing,user information,news,etc



...for shopping centres
new collections,special deals,etc



**Create your own advertising and information channel using your
encoder modulator**